9.6 SLOTIN MECHA SECTION

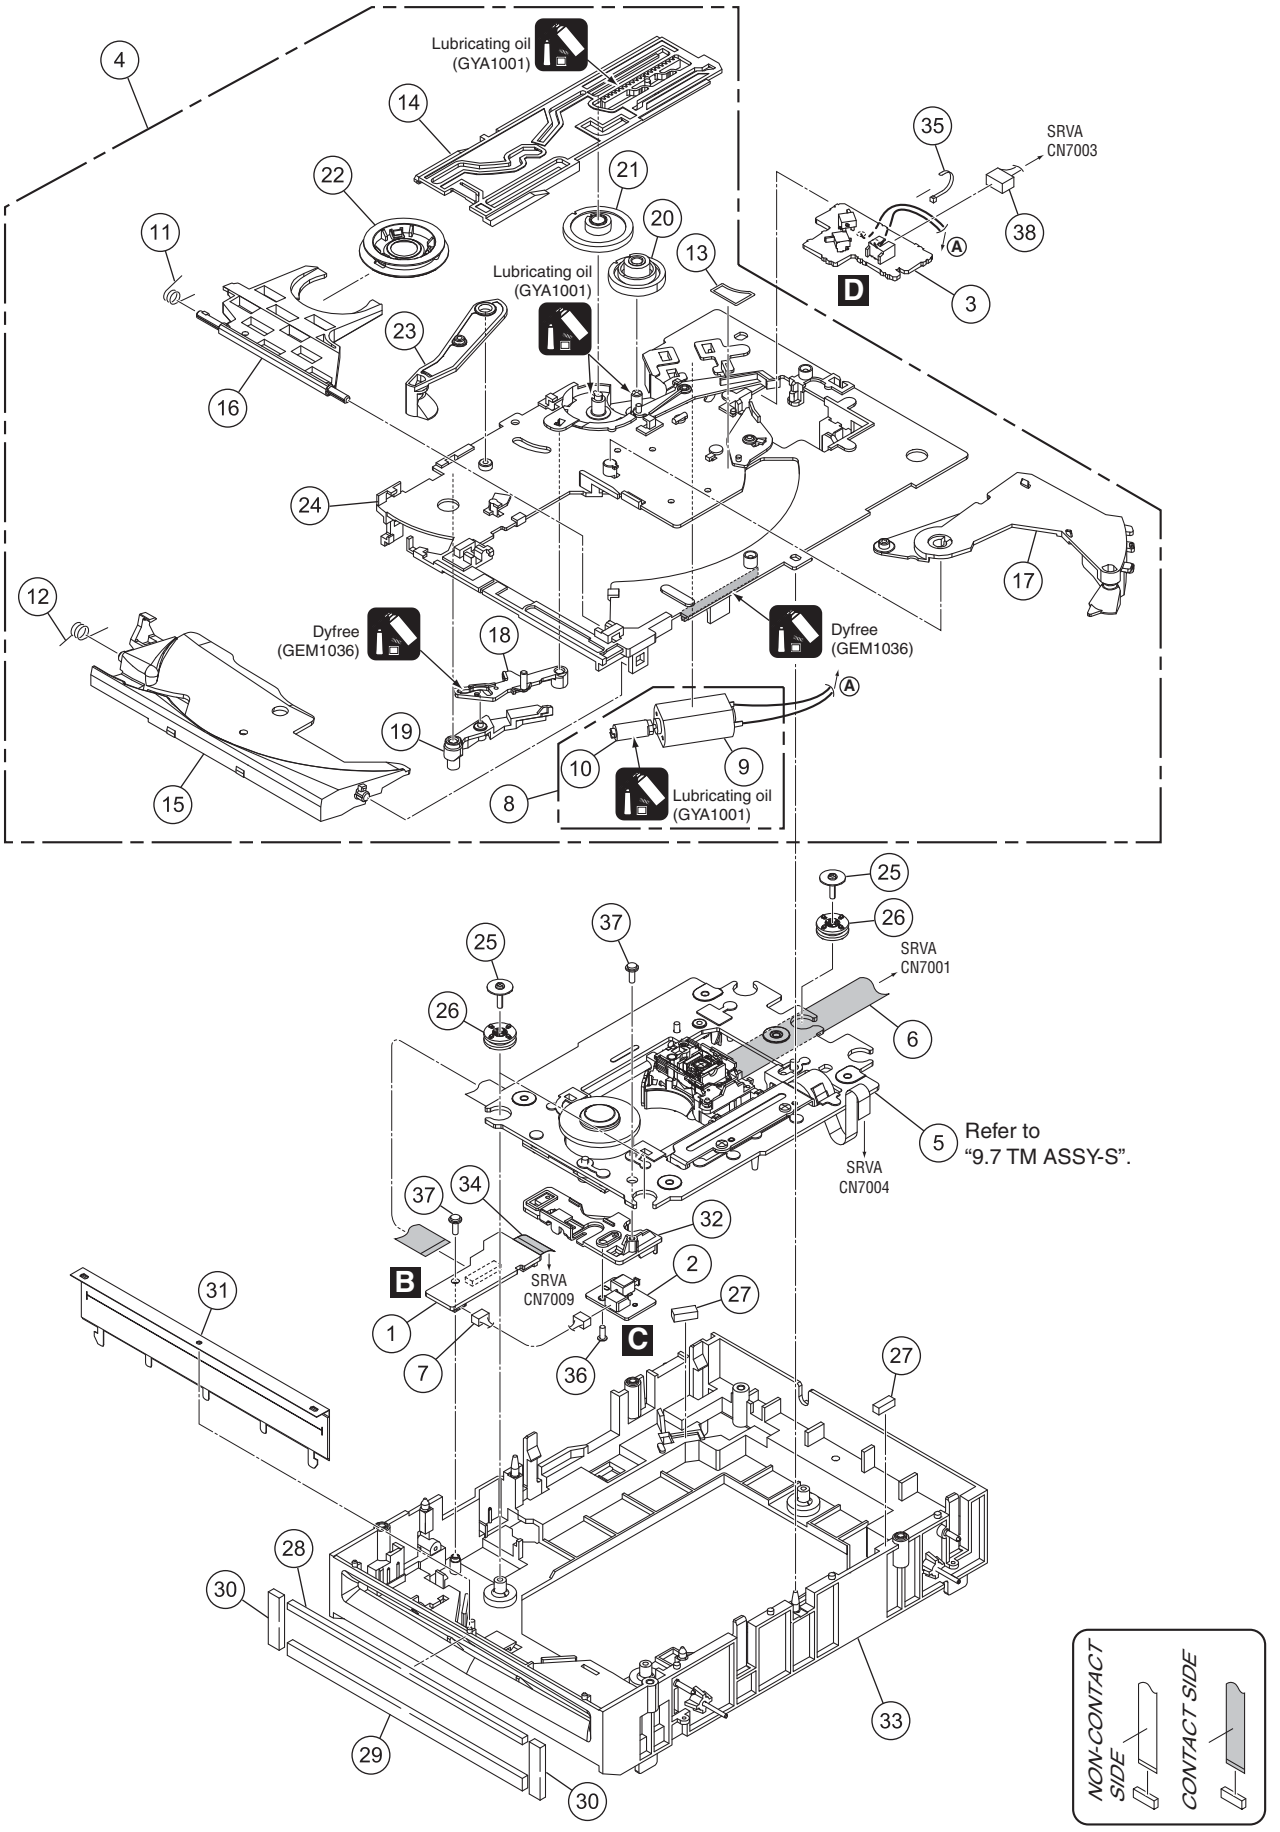

SLOTIN MECHA SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	SPCN Assy	DWX2979
	2	INSW Assy	DWS1407
	3	SLMB Assy	DWS1408
NSP	4	SLOTIN MECHA G11Assy	DXA2163
	5	TM Assy-S	DXX2595
	6	24P FFC	DDD1460
	7	Connector Assy 2P	DKP3769
	8	DC MOTOR Assy-S	DXX2510
NSP	9	DC Motor S	DXM1230
NSP	10	Worm Gear	DNK3910
	11	Clamp Spring	DBH1374
	12	Guide Spring	DBH1375
	13	SW Lever Spacer	DEC2420
	14	Main Cam	DNK3407
	15	Disc Guide	DNK3478
	16	Clamp Arm	DNK3576
	17	Eject Lever	DNK3684
	18	Lever AP	DNK3835
	19	Lever BP	DNK3836
	20	Loading Gear	DNK3911
	21	Drive Gear	DNK3912
	22	Clamper Assy	DXA2043
	23	Loading Lever Assy	DXB1880
	24	Loading Base Assy-S	DEA1022
	25	Float Screw	DBA1286
	26	Float Rubber D3	DEB1404
	27	Spacer POR (T3)	DEB1566
	28	Vessel Cushion A	DEC2852
	29	Vessel Cushion B	DEC2853
	30	Vessel Cushion C	DEC2854
	31	Front Sheet	DED1132
	32	Inside SW Base	DNK4236
	33	Float Base G11 Assy	DXB1793
	34	13P FFC	DDD1452
	35	Binder (SKB-90BK)	ZCA-SKB90BK
	36	Screw (2 x 5)	VBA1062
	37	Screw	IPZ20P060FTC
	38	Connector Assy	PF05PP-C25

2. CONTRAST OF MISCELLANEOUS PARTS

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*
- *Nos. indicate the pages and Nos. in the service manual for the base model.*
- *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47k ohm (tolerance is shown by J=5%, and K=10%).

560Ω → 56 x 10^1 → 561 ····· RD1/4PU561J
47kΩ → 47 x 10^3 → 473 ····· RD1/4PU473J
0.5Ω → R50 ····· RN2HR50K
1Ω → 1R0 ····· RS1P1R0K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62kΩ → 562 x 10^1 → 5621 ····· RN1/4PC5621F

2.1 CONTRAST TABLE

(1) CDJ-2000 and CDJ-2000/2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000 /CUXJ,/SYXJ8,/FLXJ,/KXJ,/AXJ5	CDJ-2000 /UXJCB2,/SYXJ82,/FLXJ2,/KXJ2,/AXJ52	Remarks
		PCB ASSEMBLIES			
NSP		1..TFTA Assy	DWM2355	DWM2445	
	P77-2	2..SDCB Assy	DWX2980	DWX3293	*2
	P83-1	2..TFTB Assy	DWX2882	DWX3291	*1
	P83-2	2..CDCB Assy	DWX2987	DWX3292	*1
		DISPLAY SECTION			
	P83-3	LCD	DWX3126	CWX3970	
	P83-17	LCD Packing (Top)	DEC3193	DEC3376	
	P83-18	LCD Stay	DND1263	DND1267	
	P83-19	Rear Bracket	DND1264	DND1268	
	P83-20	LCD Holder	DNH2850	Not used	
	P83-21	LCD Panel	DNK5319	DNK5951	
	P83-30	Screw	BBZ30P060FTB(x 22)	BBZ30P060FTB(x 21)	
	P83-31	Screw	BSZ20P040FTB	Not used	
		Screw	Not used	BSZ30P040FTC	No. 1
		40P FFC	Not used	DDD1541	No. 2
		Fitting/LCD	Not used	DNH2992	No. 3

(2) CDJ-2000/CUXJ and CDJ-2000/UXJCB2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/CUXJ	CDJ-2000/UXJCB2	Remarks
		PACKING SECTION			
⚠	P75-1	Power Cable	ADG7021	ADG7022	
	P75-23	Packing Case	DHG2800	DHG3025	

(3) CDJ-2000/SYXJ8 and CDJ-2000/SYXJ82 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/SYXJ8	CDJ-2000/SYXJ82	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2799	DHG3026	

(4) CDJ-2000/FLXJ and CDJ-2000/FLXJ2 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/FLXJ	CDJ-2000/FLXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2801	DHG3028	

(5) CDJ-2000/KXJ5 and CDJ-2000/KXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/KXJ	CDJ-2000/KXJ2	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2804	DHG3029	

(6) CDJ-2000/AXJ5 and CDJ-2000/AXJ52 are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-2000/AXJ5	CDJ-2000/AXJ52	Remarks
		PACKING SECTION			
	P75-23	Packing Case	DHG2803	DHG3030	

*1 Refer to “3.PCB PARTS LIST”, “5.SCHEMATIC DIAGRAM” and “6.PCB CONNECTION DIAGRAM”.

*2 Although DWX2980 and DWX3293 are different in part number, they are constructed same. Refer to “CDJ-2000/CUXJ(RRV3999)”.

Changing the constants for the parts of the MAIN and JACB Assys

With a modification of the LCD section, the constants for the parts of the MAIN and JACB Assy, have been changed for improvement of the sound quality.

Mark	No.	Description	Part No.		
MAIN Assy : DWG1660					
RESISTORS					
R	570	RS1/16SS332J	=>	RS1/16SS222J	
R	571	RS1/16SS332J	=>	RS1/16SS222J	
R	572	RS1/16SS332J	=>	RS1/16SS222J	
R	573	RS1/16SS332J	=>	RS1/16SS222J	
CAPACITORS					
C	3093	CEHVAW101M16	=>	CCH1565	
JACB Assy : DWX2988					
CAPACITORS					
C	9401	CEHAZL220M50	=>	CEHAZL101M25	
C	9404	CEHAZL220M50	=>	CEHAZL101M25	